

Reduced Height Electromechanical Material Testing Frame

Test Type


Tension, Compression, Flex,
Peel, Shear and more..

Interfaces

Horizon software,HMC, VMC,
Proterm

Applications

Where lab ceiling height of lab is
a problem or where the testing
machine frame is to be placed
inside a gas or environment
controlled chamber

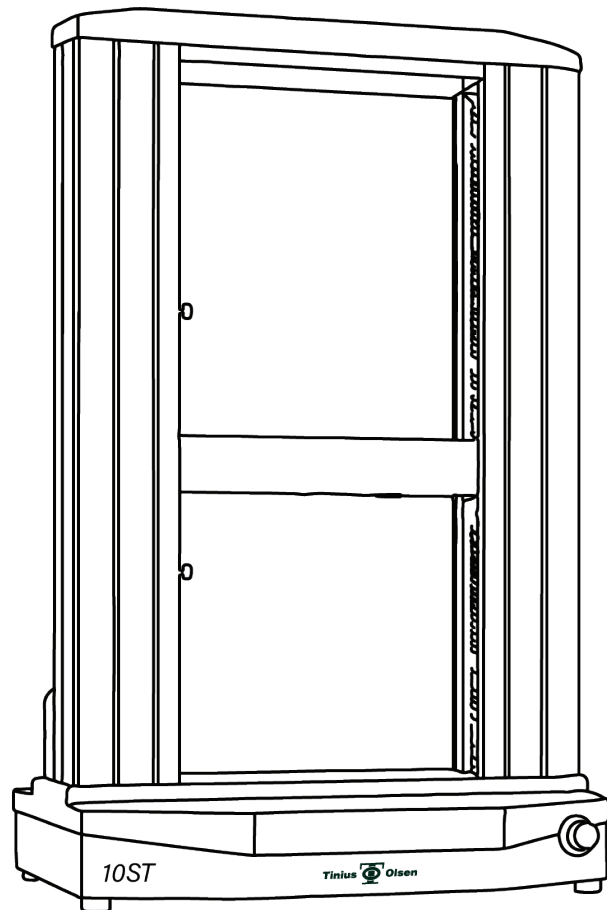

- + Reduced crosshead travel (690mm)
- + Suitable for tension, compression, flexure, shear and other tests to a maximum force of 10kN/2,000lbf.
- + Meets or exceeds the requirements of national and international standard for materials testing systems.
- + Bluetooth-enabled handheld interface allows maximum flexibility when paired to a testing frame.
- + 8 full-length T-slots built into the columns to allow accessories to be securely mounted to the test frame.
- + Built-in pneumatic distribution ports provide local air supply to pneumatic grips.

Model 10ST Reduced Height

The 10ST reduced height model designed for tension, compression, flexure and shear strength testing on materials and assemblies. The frame has extended height by 400mm as compared to standard model. The robust design that incorporates quality materials and components ensures that our reputation for superior system performance, ease of use, and longevity is maintained. A variety of loadcells are available at differing capacities that give precise applied load measurements from the smallest test specimen to ones that go to full machine capacity. Test machines become complete, powerful test systems with the addition of grips to hold the specimen, strain measurement instrumentation and Tinius Olsen's Horizon Data Analysis software

Interface Options

HMC3.0

Wireless handheld interface that is connected to the frame via Bluetooth. The interface features an Android-based operating platform and can be used to control the machine by itself or in conjunction with Tinius Olsen's Horizon software.

Proterm

Familiar handheld interface that is tethered to the machine. With its larger, tactile, sealed keypad, this interface is ideal for operators who use gloves to load and unload specimens and prefer a push button keypad. It requires virtual machine control software running on a connected PC to operate the basic machine functions and report basic numerical test data.



Options and Accessories

- + Grips and fixtures can be easily mounted securely with a simple locking pin, which also allows simple and rapid changes.
- + Full range of precision extensometers and deflectometers are available using optical, video, laser, encoder, strain gage and/or LVDT technologies.
- + Furnaces and environmental chambers can be installed for tests at high or low temperatures.
- + Safety enclosures with interlocks can be installed to protect operators from violent specimen breaks.
- + Tinius Olsen's Horizon software can be connected to the frame by the operator.

TO order numbers

99-991-1010/30

Materials Testing Machine, Reduced Model 10ST -400mm Height, Twin Column, 10kN

99-991-9000/03

HMC 3.0 Wireless Handheld Sys. w/Locking dock and arm assembly; Fit ST Series

03070246

Handheld Terminal for Mech. Sys. w/ Display, Keypad, Interface, Black Case; 1114

Specifications

Frame capacity	10kN / 1,000kgf / 2,000lbf	
Proof tested	50% over frame capacity	
Mounting	Table mounting	
Test zone	One	
Number of columns	Two	
Column	Material	Aluminium extrusion
	Finish	Anodized
	Color	Natural
Base	Material	Mild Steel
	Finish	Pre-primed, top powder coat paint
	Color	TO Cool Grey Web # E63027
Crosshead	Material	Mild Steel Solid
	Finish	Pre-primed, top powder coat paint
	Color	TO Green Web #004C45
Base Cover	Material	ABS recyclable
	Color	Cal Black Web # 111820
Distance Between Columns	mm	410
	in	16
Max. Crosshead travel	mm	690
	in	27
Stiffness	kN/mm	100
	klbf/in	571
Height	mm	1225
	in	48
Width	mm	729
	in	29
Depth	mm	506
	in	20
Weight	kg	119
	lbs	262
Force protection system	Yes, digital	

Specifications

Displacement protection system	Yes, mechanical and user programmable
Accessory fitting interface type	Female diameter
Ball screw type	High precision low backlash
Ball screw cover/ protection	Yes
Crosshead drive	DC servo motor
Feet material	Non-adjustable impact resistance plastic
Pneumatic air distribution	4mm OD hose with pushfit coupling, rated to 100psi maximum
Reference rule to support crosshead positioning	Yes, mm and inches
T slots in columns for accessory mounting	8 x M6/M8
Noise at full crosshead speed 2m radius	22db

Controller Specifications

Max data processing rate	168MHz	
Data acquisition rate at PC	1000Hz	
Number of instrument device connections	Internal	Three
	External	Four
Bluetooth enabled	v4.0 with A2DP, LE, EDR	
External PC connection	USB	
User interface connectivity	TO HMC3.0, Proterm, Horizon	

Force Measurement

Force measuring device type	Strain gage-based load cell
Load cells available	5N, 10N, 25N, 50N, 100N, 250N, 500N, 1kN, 2.5kN, 5kN, 10kN
Resolution	One part in 8,388,608
Accuracy	0.2% of applied force across load cell force range

Specifications

Range	0.2-100%
	10N load cell - 0.5-100%
	5N load cell - 1-100%
Calibration standard	± 0.5% to ISO 7500-1, ASTM E4
Internal sampling rate	1000Hz

Extension Measurement

Resolution	0.1µm
Accuracy	±50µm
Range	0.1µm to 690mm
Calibration standard	ISO 9513
Internal sampling rate	2.73kHz

Position Control

Test Speed	mm/min	0.0001-500 to 10kN
	mm/min	0.0001 -1000 to 5kN
	in/min	0.000004-20 to 2,000lbf
	in/min	0.000004-40 to 1,000lbf

Specifications

Resolution	µm	0.1
	in	0.000004
Accuracy	±0.05% of indicated speed	
Return speed post test	mm/min	0.0001-1,000
	in/min	0.000004-40
Crosshead positioning Speed	mm/min	0.0001-1,000
	in/min	0.000004-40
Return to 0 function	Yes	

Power Requirements

Supply voltage	115/230V
Frequency	50/60Hz
Power	530W ± 10%

Atmospheric Requirements

Operating temp.	5 to 40°C (41 to 104°F)
Operating humidity	10-80% non-condensing wet bulb method
Storage temp.	-10 to 45°C (14 to 113°F)
Storage humidity	10-80% non-condensing wet bulb method